

Increasing productivity down under

NEW GENERATION TECHNOLOGY

From A Stable of Quality Underground Workhorses...

ELPHINSTONE

CATERPILLAR ELPHINSTONE PTY. LTD.





69D EJECTOR TRUCK Rigid Frame

TOOLS FOR UNDERGROUND MINING


EJECTOR TRUCK RIGID FRAME

| | | |
|------------------------------------|--------------------|---------------|
| Flywheel Power (Gross) | 380kW | (510HP) |
| Engine Model | 3408E HEUI | |
| Weight Empty | 34,700kg's | (76,513lbs) |
| Weight Loaded | 70,900kg's | (156,335lbs) |
| Distribution: Loaded: | | |
| Front | 30.5% | |
| Rear | 69.5% | |
| Maximum Capacity, Tons | 36.2 | (40.0 US) |
| Cubic Capacity (Standard Body) | | |
| Heaped (2:1) (SAE) | 18.2m ³ | (23.8 cu.yd.) |
| Turning Circle | 18.0m | (714") |
| Height | 3460mm | (136") |
| Length | 7760mm | (306") |
| Width | 3690mm | (145") |
| Loading Height (Empty) | 3160mm | (124") |
| Speeds Forward | | |
| 1st | 10.8 | (7.0) |
| 2nd | 15.1 | (9.5) |
| 3rd | 20.4 | (12.9) |
| 4th | 27.4 | (17.4) |
| 5th | 37.0 | (23.6) |
| 6th | 50.1 | (31.8) |
| 7th | 75.2 | (46.7) |
| Speeds Reverse | | |
| 1st | 13.5 | (9.5) |
| Tyre Size 18.00 x 33, 2 ** RADIALS | | |
| Body Dump Eject Time 16 Secs. | | |
| Ground Clearance | 512mm | (20") |

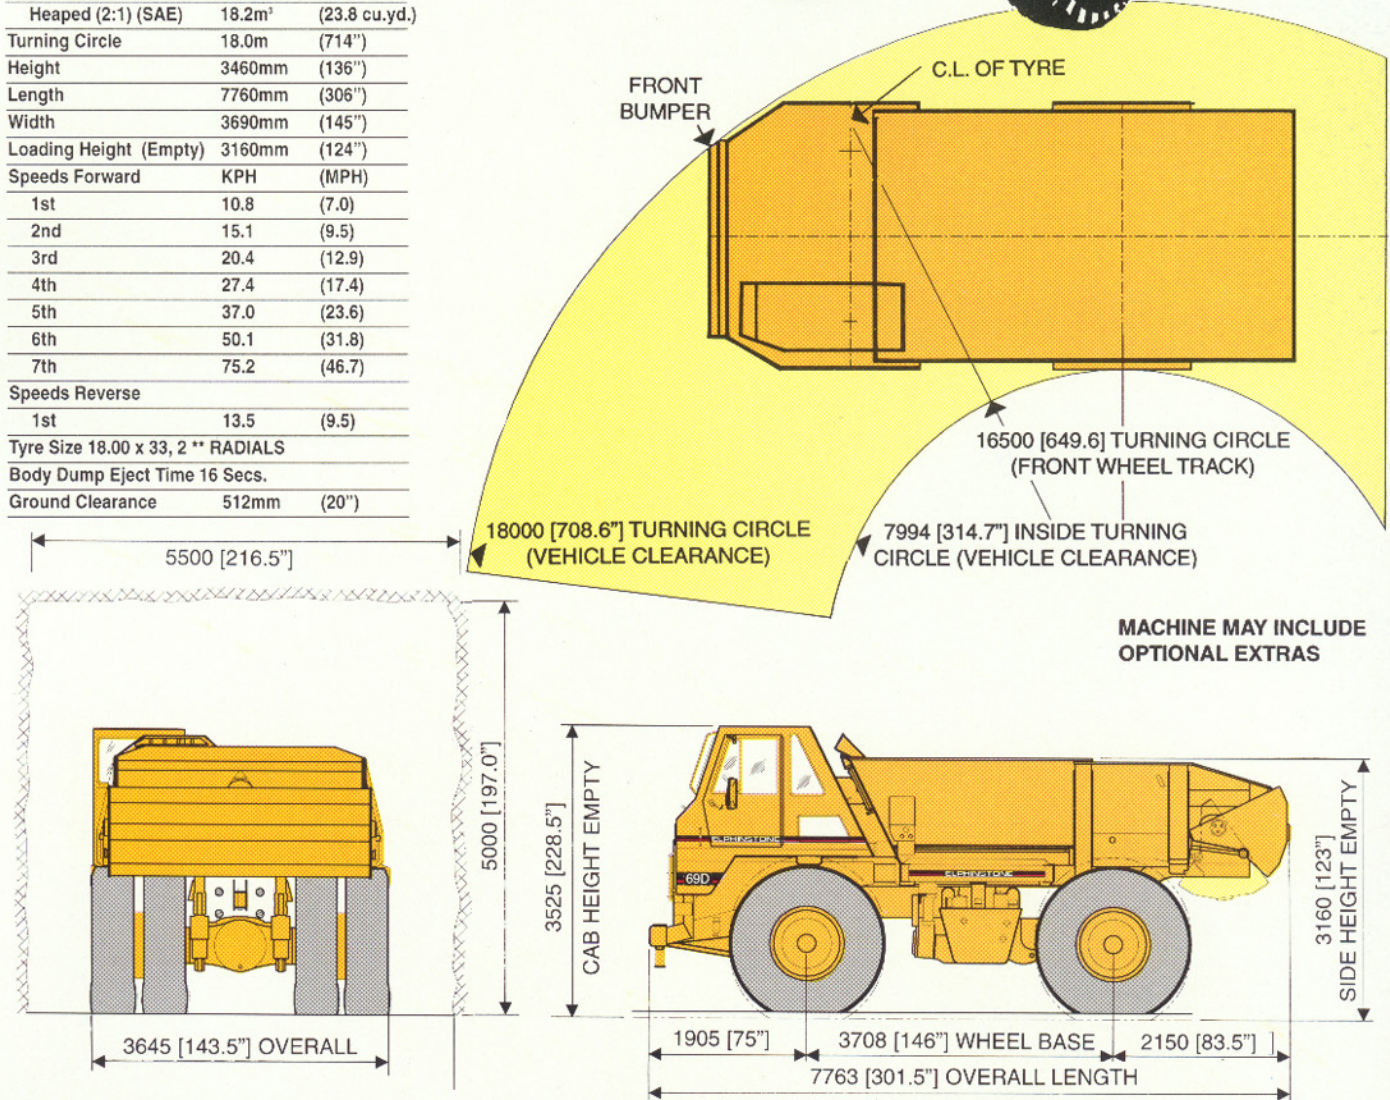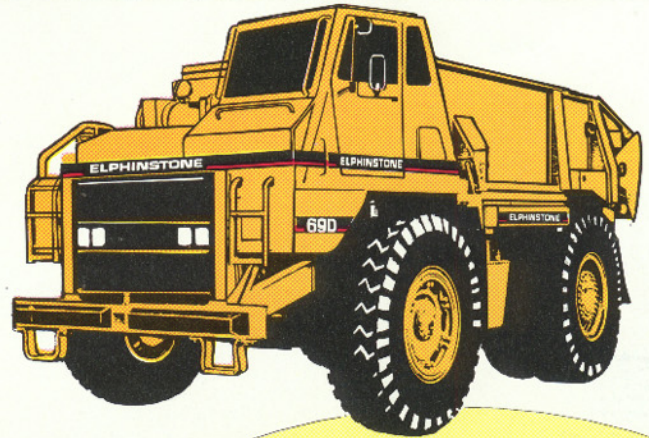

SUBJECT TO CHANGE WITHOUT NOTICE... COPYRIGHT.

AREA ELPHINSTONE DEALER

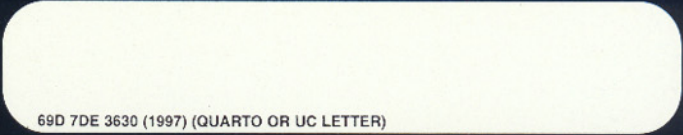

69D 7DE 3630 (1997) (QUARTO OR UC LETTER)

MANUFACTURED IN AUSTRALIA FOR WORLD EXPORT

