



Granby Mine Cars



APPLICATIONS

Rail haulage of broken rock in underground mining and tunneling industries.


FEATURES

Sizes available from 60 to 360+ cubic feet with rail gauges from 24" to 36".
Various dumping arrangements possible.
Lined to individual requirements.
Standard link and pin couplers.

OPTIONS

Chevron suspension for superior tracking ability in rough conditions.

Automatic coupler (mates with Willison coupler)

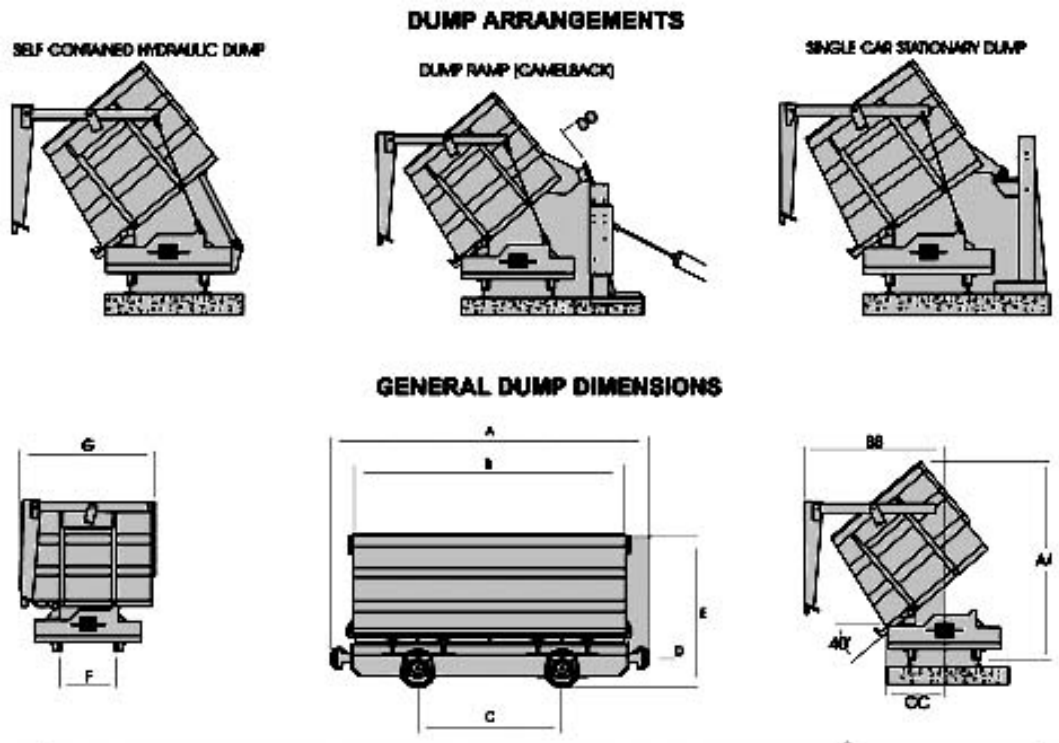

MINE CAR DIMENSIONS GRANBY TYPE MUCK CARS

OPTION No.	1	2	3	4	5	6
CAPACITY RANGE IN CUBIC FT	60-80	80-120	120-160	160-200	200-250	250-350
A OVERALL LENGTH	9'6"	11'2"	12'8"	13'8"	14'6"	15'8"
B BOX LENGTH	7'4"	8'4"	9'	9'6"	10'8"	12'6"
C WHEEL BASE	3'	3'6"	4'6"	5'4"	6'	7'
D RAIL TO HITCH CENTERLINE	12"	14"	14"	14"	16"	16"
E RAIL TO TOP OF DUMP BOX	4'4"	5'	5'6"	5'10"	6'2"	7'6"
F MINIMUM TRACK GUAGE	24"	24"	30"	30"	30"	36"
G OVERALL CAR WIDTH (NOT INCLUDING DD OR EE)	4'4"	4'5"	4'10"	5'2"	5'5"	6'9"
AA MAXIMUM DUMP HEIGHT	5'6"	6'4"	7'10"	8'4"	8'8"	9'4"
BB MAXIMUM DUMP WIDTH FROM CENTERLINE	3'3"	3'8"	4"	4'8"	5'4"	5'9"

CC HITCH CENTERLINE TO BOX EDGE (DUMP POS.)	1'10"	2'	2'3"	2'6"	2'10"	3'2"
DD DUMP WHEEL OVERHANG (DUMP RAMP TYPE)	6"	6"	7"	8"	10"	15"
OPTION No.	1	2	3	4	5	6

*For more detailed information on our products or
for custom design work, please contact a member of
our Sales Team.
www.wabicorp.com*